

Please cite this article as:

Stanisław Kukla, Mariusz Szewczyk, Free vibration of annular plates of stepped thickness resting on winkler elastic foundation, Scientific Research of the Institute of Mathematics and Computer Science, 2007, Volume 6, Issue 1, pages 109-116.

The website: <http://www.amcm.pcz.pl/>

Scientific Research of the Institute of Mathematics and Computer Science

---

## FREE VIBRATION OF ANNULAR PLATES OF STEPPED THICKNESS RESTING ON WINKLER ELASTIC FOUNDATION

*Stanisław Kukla<sup>1</sup>, Mariusz Szewczyk<sup>2</sup>*

*Institute of Mathematics and Computer Sciences, Technical University of Czestochowa, Poland*

*email: <sup>1</sup> kukla@imi.pcz.pl, <sup>2</sup> szmariusz@imi.pcz.pl*

**Abstract.** This paper concerns axisymmetric free vibration of annular plates of stepped thickness resting on Winkler elastic foundation. Exact solution to vibration problem was obtained by dividing of considered plate into uniform annular plates and by using the Green's function method. Numerical examples are presented.

### Introduction

The problems of the free vibration of circular and annular plates of stepped thickness have been the subject of many papers [1-5]. Solutions to free vibration problems of stepped-thickness plates in papers [1, 2] were obtained by using finite element method and optimized Rayleigh-Ritz method. In articles [3, 4] a closed form solution to considered vibration problems was obtained by using Green's function method. The vibration problems of circular plates resting on elastic foundation have been investigated also by many authors, (e.g. [5-7]). The authors of article [5] obtained the solution by using the Galerkin's method. In paper [7] a two-parameter model was used to represent the foundation. In article [6] circular plate on elastic foundation was modeled as a series of simply supported annular plates resting on supporting springs along their common edges.

The present paper deals with a free vibration problem of stepped annular plates resting on Winkler elastic foundation. Exact solution to considered problem is obtained by dividing of the stepped plate into uniform annular plates. Characteristic equation is obtained in analytical form by using the Green's function method. Formulation and solution to the problem take into account arbitrary finite number of uniform plates composing the stepped plate. Analytical solution to presented vibration problem is used to perform numerical analysis of an influence of parameters characterizing the system on its natural frequencies. Numerical examples presented here deal with stepped annular plates composed of two uniform plates.

## 1. Formulation and solution to the problem

Consider an annular plate resting on Winkler elastic foundation. Thickness of a plate is varying stepwise along  $(n - 1)$  concentric circles as schematic shown in Figure 1. These circles mark out  $n$  plate elements - uniform annular plates of thickness  $h_j$  and radii  $a_{j-1}, a_j$ , ( $a_{j-1} < a_j, j = 1, \dots, n$ ).

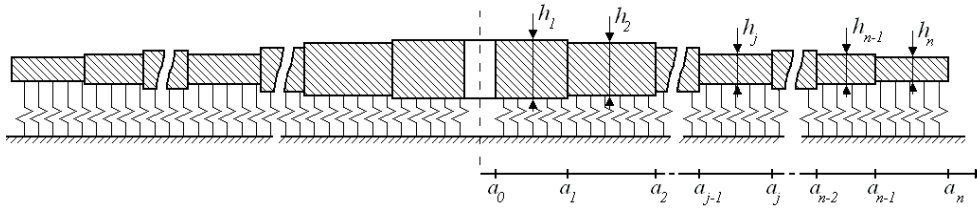


Fig. 1. A stepped annular plate resting on Winkler elastic foundation

Free vibration of  $j$ -th plate element is governed by differential equation:

$$D_j \frac{1}{r} \frac{\partial}{\partial r} \left\{ r \frac{\partial}{\partial r} \left[ \frac{1}{r} \frac{\partial}{\partial r} \left( r \frac{\partial w_j}{\partial r} \right) \right] \right\} + \rho_j h_j \frac{\partial^2 w_j}{\partial t^2} + k_j w_j =$$

$$= -s_{j-1} \frac{1}{r} \delta(r - a_{j-1}) + m_{j-1} \frac{1}{r} \delta'(r - a_{j-1}) + s_j \frac{1}{r} \delta(r - a_j) - m_j \frac{1}{r} \delta'(r - a_j) \quad (1)$$

where  $w_j = w_j(r, t)$  is a transverse displacement of  $j$ -th plate,  $r, t$  - radial and time variable,  $D_j = E_j h_j^3 / [12(1 - \nu_j^2)]$  - bending rigidity of plate,  $E_j$  - Young modulus,  $\nu_j$  - Poisson ratio,  $\rho_j$  - mass per unit volume,  $k_j$  - stiffness coefficient of the foundations over a region of  $j$ -th plate,  $s_j = s_j(t)$  - the shearing force,  $m_j = m_j(t)$  - bending moment,  $\delta(\cdot)$  is the Dirac delta function. It is also assumed that  $s_0 = m_0 = s_n = m_n = 0$ .

Equation (1) is completed by boundary conditions and continuity conditions. The boundary conditions can be written symbolically in the form:

$$\mathbf{B}_0[w_0] \Big|_{r=a_0} = 0, \quad \mathbf{B}_n[w_n] \Big|_{r=a_n} = 0 \quad (2)$$

and continuity conditions are:

$$w_j(a_j, t) = w_{j+1}(a_j, t)$$

$$\frac{d}{dr} w_j(r, t) \Big|_{r=a_j} = \frac{d}{dr} w_{j+1}(r, t) \Big|_{r=a_j}, \quad j = 1, \dots, n-1 \quad (3)$$

In case of free harmonic vibration of the system one assumes:

$$w_j(r, t) = W_j(r) e^{i\omega t}, \quad s_j = S_j e^{i\omega t}, \quad m_j = M_j e^{i\omega t} \quad (4)$$

where  $\omega$  is an eigenfrequency of the system. Introducing simultaneously dimensionless quantities:

$$\bar{r}_j = r/a_j, \quad \bar{r}_{j,i} = r_{j,i}/a_j, \quad \bar{W}_j = W_j/a_j \tag{5}$$

and taking into account (4), equation (1) and the continuity conditions take the form:

$$\mathbf{L}_j[\bar{W}_j] = -\bar{S}_{j-1} \frac{A_j}{\alpha_j} \frac{1}{\bar{r}_j} \delta(\bar{r}_j - \alpha_j) + \bar{M}_{j-1} A_j \frac{1}{\bar{r}_j} \delta'(\bar{r}_j - \alpha_j) + \bar{S}_j \frac{1}{\bar{r}_j} \delta(\bar{r}_j - 1) - \bar{M}_j \frac{1}{\bar{r}_j} \delta'(\bar{r}_j - 1) \tag{6}$$

$$\bar{W}_j(1) = \frac{1}{\alpha_{j+1}} \bar{W}_{j+1}(\alpha_{j+1}), \quad \left. \frac{d}{d\bar{r}_j} \bar{W}_j(\bar{r}_j) \right|_{\bar{r}_j=1} = \left. \frac{d}{d\bar{r}_{j+1}} \bar{W}_{j+1}(\bar{r}_{j+1}) \right|_{\bar{r}_{j+1}=\alpha_{j+1}} \tag{7}$$

where:  $\mathbf{L}_j = \nabla^4 - (\Omega_j^4 - K_j)$ ,  $\nabla^2 = d^2/dr^2 + (1/r) d/dr$ ,  $\Omega_j^4 = \rho_j h_j \omega^2 a_j^4 / D_j$ ,  $K_j = k_j a_j^4 / D_j$ ,  $\alpha_j = a_{j-1}/a_j$ ,  $A_j = D_{j-1}/D_j$ ,  $\bar{S}_j = S_j a_j / D_j$ ,  $\bar{M}_j = M_j / D_j$ ,  $j = 1, \dots, n$ .

Applying to equations (6) the Green's function method and using properties of Dirac delta function allow us to obtain a set of equations:

$$W_j(r_j) = -\tilde{S}_{j-1} \frac{A_j}{\alpha_j} G^j(r_j, \alpha_j; \bar{\Omega}_j) - \tilde{M}_{j-1} A_j \left( \left. \frac{d}{d\xi_j} G^j(r_j, \xi_j; \bar{\Omega}_j) \right) \right|_{\xi_j=\alpha_j} + \tilde{S}_j G^j(r_j, 1; \bar{\Omega}_j) + \tilde{M}_j \left( \left. \frac{d}{d\xi_j} G^j(r_j, \xi_j; \bar{\Omega}_j) \right) \right|_{\xi_j=1} \tag{8}$$

where dashes over symbols  $r$ ,  $W$ ,  $S$ ,  $M$  are omitted.  $G^j$  denotes the Green's function of differential operator  $\mathbf{L}_j$ . Function  $G^j$  is defined over region  $[\alpha_j, 1] \times [\alpha_j, 1]$ , ( $0 < \alpha_j < 1$ ). Green's functions of differential operators occurring in vibration problems of uniform annular plates were derived in papers [3, 4, 8, 9].

Characteristic equation to considered free vibration problem of stepped annular plate resting on elastic foundation is obtained by using equations (8) in continuity conditions (7). Using equations (8) in conditions (7) a system of equation is obtained. This system can be written in a matrix form:

$$\mathbf{A} \mathbf{X} = \mathbf{0} \tag{9}$$

where  $\mathbf{X} = [\tilde{S}_1 \quad \tilde{M}_1 \quad \dots \quad \tilde{S}_{n-1} \quad \tilde{M}_{n-1}]^T$  is the vector of unknown quantities,  $\mathbf{A} = [\mathbf{A}_{ji}]_{1 \leq j, i \leq n-1}$  is a square-matrix where:

$$\mathbf{A}_{j,j-1} = -\Delta_j \begin{bmatrix} \frac{1}{\alpha_j} G^j(1, \alpha_j) & G_{\xi_j}^j(1, \alpha_j) \\ \frac{1}{\alpha_j} G_{r_j}^j(1, \alpha_j) & G_{\xi_j r_j}^j(1, \alpha_j) \end{bmatrix}$$

$$\mathbf{A}_{j,j-1} = \begin{bmatrix} G^j(1,1) & G_{\xi_j}^j(1,1) \\ G_{r_j}^j(1,1) & G_{\xi_j r_j}^j(1,1) \end{bmatrix} + \Delta_{j+1} \begin{bmatrix} \frac{1}{\alpha_{j+1}^2} G^{j+1}(\alpha_{j+1}, \alpha_{j+1}) & \frac{1}{\alpha_{j+1}} G_{\xi_{j+1}}^{j+1}(\alpha_{j+1}, \alpha_{j+1}) \\ \frac{1}{\alpha_{j+1}} G_{r_{j+1}}^{j+1}(\alpha_{j+1}, \alpha_{j+1}) & G_{\xi_{j+1} r_{j+1}}^{j+1}(\alpha_{j+1}, \alpha_{j+1}) \end{bmatrix} \quad (10)$$

$$\mathbf{A}_{j,j+1} = - \begin{bmatrix} \frac{1}{\alpha_{j+1}} G^{j+1}(\alpha_{j+1}, 1) & \frac{1}{\alpha_{j+1}} G_{\xi_{j+1}}^{j+1}(\alpha_{j+1}, 1) \\ G_{r_{j+1}}^{j+1}(\alpha_{j+1}, 1) & G_{\xi_{j+1} r_{j+1}}^{j+1}(\alpha_{j+1}, 1) \end{bmatrix}$$

$$\mathbf{A}_{ji} = \begin{bmatrix} 0 & 0 \\ 0 & 0 \end{bmatrix} \quad \text{for } i < (j-1) \text{ and } i > (j+1)$$

Equation (9) has non-trivial solution if and only if:

$$\det \mathbf{A} = 0 \quad (11)$$

Equation (11) is the characteristic equation of the considered vibration problem.

## 2. Green's function

The Green's function  $G(r, \xi)$ , corresponding to an annular plate resting on Winkler elastic foundation is a solution of the equation:

$$\nabla^4 G(r, \xi) - (\Omega^4 - K)G(r, \xi) = \frac{1}{r} \delta(r - \xi) \quad (12)$$

This function satisfies, with respect to variable  $r$ , boundary conditions along the plate's edges:  $r = a$  and  $r = b$ . For example, the conditions for the annular plate with free edges are:

$$\frac{d^2 G}{dr^2} + \nu \frac{1}{r} \frac{dG}{dr} = 0, \quad \frac{d}{dr} \left[ \frac{1}{r} \frac{d}{dr} \left( r \frac{dG}{dr} \right) \right] = 0, \quad r = a, \quad r = b \quad (13)$$

The solution of equation (12) can be written in the form of a sum [4]:

$$G(r, \xi) = G_0(r, \xi) + G_1(r, \xi) H(r - \xi) \quad (14)$$

where  $G_0(r, \xi)$  and  $G_1(r, \xi)$  are solutions of a homogeneous equation:

$$\nabla^4 G_i(r, \xi) - (\Omega^4 - K)G_i(r, \xi) = 0, \quad (i = 0, 1) \tag{15}$$

Moreover,  $G_1(r, \xi)$  satisfies following conditions [8]:

$$G_1(r, \xi)\Big|_{r=\xi} = \frac{\partial}{\partial r} G_1(r, \xi)\Big|_{r=\xi} = \frac{\partial^2}{\partial r^2} G_1(r, \xi)\Big|_{r=\xi} = 0 \text{ and } \frac{\partial^3}{\partial r^3} G_1(r, \xi)\Big|_{r=\xi} = \frac{1}{\xi} \tag{16}$$

Once the function  $G_1$  is known,  $G_0$  must be such function that  $G$  given by equation (14) satisfies the boundary conditions.

To solve the equation (15), two cases are considered:

Case 1:  $\Omega^4 - K > 0$ :

Denoting  $\bar{\Omega}^4 = \Omega^4 - K$ , equation (15) can be rewritten as [10]:

$$(\nabla^2 + \bar{\Omega}^2)(\nabla^2 - \bar{\Omega}^2)G_i(r, \xi) = 0 \tag{17}$$

and general solution  $u(r)$  of equation (17) can be presented in the form:

$$u(r) = c_1 J_0(r \bar{\Omega}) + c_2 Y_0(r \bar{\Omega}) + c_3 I_0(r \bar{\Omega}) + c_4 K_0(r \bar{\Omega}) \tag{18}$$

where  $J_0, Y_0$  are Bessel functions and  $I_0, K_0$  are modified Bessel functions. Using (18) and the conditions (16), we find the function  $G_1(r, \xi)$  as [5]:

$$G_1(r, \xi) = \frac{1}{2\bar{\Omega}^2} [I_0(r \bar{\Omega})K_0(\xi \bar{\Omega}) - I_0(\xi \bar{\Omega})K_0(r \bar{\Omega}) + \frac{\pi}{2} (J_0(r \bar{\Omega})Y_0(\xi \bar{\Omega}) - J_0(\xi \bar{\Omega})Y_0(r \bar{\Omega}))] \tag{19}$$

Hence, on the basis of equations (14) and (18), we have

$$G(r, \xi) = C_1 J_0(r \bar{\Omega}) + C_2 Y_0(r \bar{\Omega}) + C_3 I_0(r \bar{\Omega}) + C_4 K_0(r \bar{\Omega}) + G_1(r, \xi)H(r - \xi) \tag{20}$$

The constants  $C_1, C_2, C_3, C_4$ , are determined by using boundary conditions. In the considered case, the constants for classical boundary conditions are presented in reference [9].

Case 2:  $\Omega^4 - K < 0$ :

Introducing  $\bar{\Omega}^4 = K - \Omega^4$  in equation (15), we can rewritten the equation in the form:

$$(\nabla^2 + \mathbf{i}\bar{\Omega}^2)(\nabla^2 - \mathbf{i}\bar{\Omega}^2)G_i(r, \xi) = 0 \tag{21}$$

and the general solution  $u(r)$  of the equation is:

$$u(r) = \bar{c}_1 I_0(r\sqrt{\mathbf{i}\bar{\Omega}}) + \bar{c}_2 K_0(r\sqrt{\mathbf{i}\bar{\Omega}}) + \bar{c}_3 I_0(r\sqrt{-\mathbf{i}\bar{\Omega}}) + \bar{c}_4 K_0(r\sqrt{-\mathbf{i}\bar{\Omega}}) \quad (22)$$

The Bessel functions  $I_0$  and  $K_0$  of the complex arguments can be changed by Kelvin functions  $ber$ ,  $bei$ ,  $ker$ ,  $kei$ , of a real argument by using the following relationships [10]:

$$I_0(x\sqrt{\pm i}) = ber(x) \pm i bei(x), \quad K_0(x\sqrt{\pm i}) = ker(x) \pm i kei(x) \quad (23)$$

Taking into account these relationships in equation (23) we obtain a real valued function for the real argument:

$$u(r) = c_1 bei(r\bar{\Omega}) + c_2 ber(r\bar{\Omega}) + c_3 kei(r\bar{\Omega}) + c_4 ker(r\bar{\Omega}) \quad (24)$$

Using the conditions (16), we find the function  $G_1(r, \xi)$  in the form:

$$G_1(r, \xi) = \frac{1}{\bar{\Omega}^2} [bei(r\bar{\Omega})ker(\xi\bar{\Omega}) - kei(r\bar{\Omega})ber(\xi\bar{\Omega}) + ber(r\bar{\Omega})kei(\xi\bar{\Omega}) - ker(r\bar{\Omega})bei(\xi\bar{\Omega})] \quad (25)$$

The general solution of equation (12), we obtain from equation (14) and in the considered case can be written as:

$$G(r, \xi) = C_1 bei(r\bar{\Omega}) + C_2 ber(r\bar{\Omega}) + C_3 kei(r\bar{\Omega}) + C_4 ker(r\bar{\Omega}) + G_1(r, \xi)H(r - \xi) \quad (26)$$

Similarly as in the case 1, the constants  $C_1$ ,  $C_2$ ,  $C_3$ ,  $C_4$ , are determined by using boundary conditions.

### 3. Numerical examples

Presented here numerical examples deal with stepped annular plates having both edges free ( $r = a$ ,  $r = b$ ,  $b < a$ ). The plate is subdivided into two uniform annular plates: an annular plate of thickness  $h_1$  and radii  $r = b$ ,  $r = c$  and an annular plate of thickness  $h_2$  and radii  $r = c$ ,  $r = a$  ( $b < c < a$ ). In this case, characteristic equation to vibration problem (11) has the form:

$$\begin{vmatrix} G^1(1,1;\bar{\Omega}_1) + \frac{A_2}{\alpha_2^2} G^2(\alpha_2, \alpha_2; \bar{\Omega}_2) & G_{,\xi_1}^1(1,1;\bar{\Omega}_1) + \frac{A_2}{\alpha_2} G_{,\xi_2}^2(\alpha_2, \alpha_2; \bar{\Omega}_2) \\ G_{,r_1}^1(1,1;\bar{\Omega}_1) + \frac{A_2}{\alpha_2} G_{,r_2}^2(\alpha_2, \alpha_2; \bar{\Omega}_2) & G_{,\xi_1 r_1}^1(1,1;\bar{\Omega}_1) + A_2 G_{,\xi_2 r_2}^2(\alpha_2, \alpha_2; \bar{\Omega}_2) \end{vmatrix} = 0 \quad (27)$$

where  $\alpha_2 = c/a$ ,  $\Delta_2 = D_1/D_2$ ,  $G^j(r_j, \xi_j)$  is a Green's function defined over region  $[\alpha_j, 1] \times [\alpha_j, 1]$  ( $j = 1, 2$ ). It is also assumed:  $\rho_1 = \rho_2$ ,  $\nu_1 = \nu_2$  and  $E_1 = E_2$ . Then  $\Delta_2 = \alpha^3$ , where  $\alpha = h_1/h_2$ .

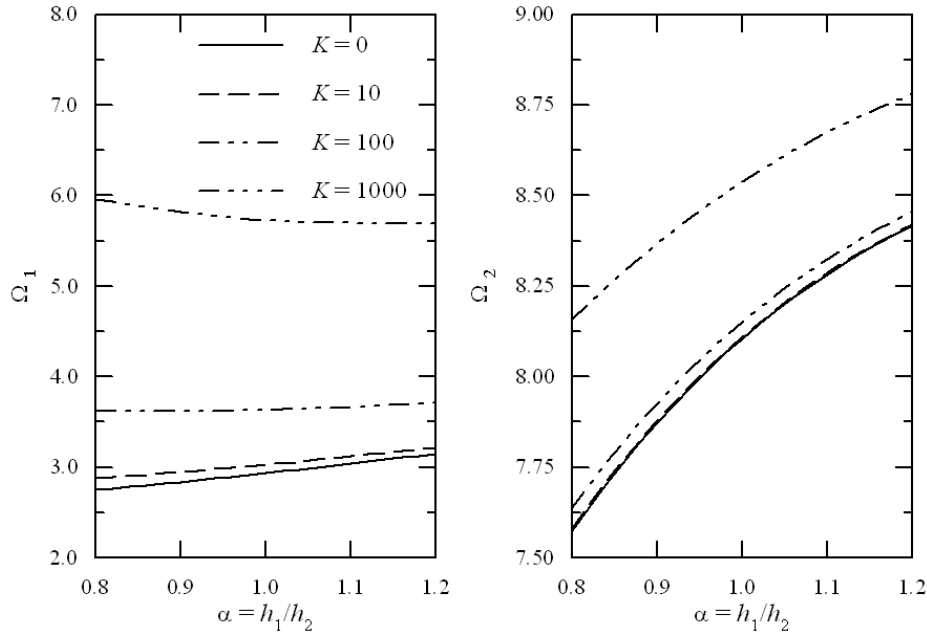


Fig. 2. Values of non-dimensional frequency parameter  $\Omega_{2,i} = \sqrt[4]{\rho h_2 \omega^2 a^4 / D_2}$  ( $i = 1, 2$ ) as a function of parameter  $\alpha = h_1/h_2$ ;  $b/a = 0.4$ ,  $c/a = 0.7$ ,  $\nu = 0.3$

Using equation (27) numerical analysis of influence of parameters characterizing the system on its natural frequency was performed. Curves in Figure 2 present values of frequency parameter  $\Omega_{2,i} = \sqrt[4]{\rho h_2 \omega^2 a^4 / D_2}$  ( $i = 1, 2$ ) for free-free annular plate as a function of ratio  $\alpha = h_1/h_2$  and for various values of foundation's parameter  $K_2 = K$ . Results were obtained for  $b/a = 0.4$ ,  $c/a = 0.7$ ,  $\nu = 0.3$ . We can observe both the parameters  $\alpha$  and  $K$  have significant effect on natural frequencies of stepped plate.

## Conclusions

In this paper an exact solution to the problem of free vibration of a stepped annular plate resting on elastic foundation is presented. The formulation of the problem consists of the differential equations of motion of the plates, continuity conditions and boundary conditions. The solution to vibration problem is obtained by dividing of the stepped plate into uniform annular plates. Exact solu-

tion is obtained by using the Green's function method. The formulation and solution to the problem take into account an arbitrary number of uniform plates. Presented numerical example shows an influence of selected parameters characterizing the system on its natural frequencies.

## References

- [1] Avalos D.R., Larrondo H.A., Sonzogni V., Laura P.A.A., A general approximate solution of the problem of free vibrations of annular plates of stepped thickness, *Journal of Sound and Vibration* 1996, 196, 3, 275-283.
- [2] Gutierrez R.H., Laura P.A.A., Fundamental frequency of an annular circular plate of non-uniform thickness and an intermediate concentric circular support, *Journal of Sound and Vibration* 1999, 224, 4, 775-779.
- [3] Kukla S., Szewczyk M., Analiza drgań własnych płyt pierścieniowych o skokowo zmiennej grubości, *Modelowanie Inżynierskie*, Tom 1, Nr 32, Gliwice 2006, 331-338.
- [4] Kukla S., Szewczyk M., Free vibration of annular and circular plates of stepped thickness. Application of Green's function method, *Scientific Research of the Institute of Mathematics and Computer Science* 2006, 1, 5, 46-54.
- [5] Celep Z., Turhan D., Axisymmetric vibrations of circular plates on tensionless elastic foundation, *Journal of Applied Mechanics* 1990, vol. 57, 677-681.
- [6] Utku M., Citipitioğlu E., İnceleme İ., Circular plates on elastic foundation modelled with annular plates, *Computers and Structures* 2000, 78, 365-374.
- [7] Sargand S.M., Das Y.C., Jayasuriya A.M., A refined model for dynamic analysis of circular plates on elastic foundations, *Journal of Sound and Vibration* 1992, 157(2), 233-241.
- [8] Kukla S., Szewczyk M., Frequency analysis of annular plates with elastic concentric supports by using a Green's function method, *Journal of Sound and Vibration* 2007, 300(1-2), 387-393.
- [9] Szewczyk M., Zastosowanie metody funkcji Greena w zagadnieniach drgań własnych płyt i układów płyt kołowych i pierścieniowych, praca doktorska, Częstochowa 2007.
- [10] McLachlan N.W., *Funkcje Bessela dla inżynierów*, PWN, Warszawa 1964.